

ENDURANCE LIFT ESP Passes 2 Year Run Life Milestone in the Bakken

Endurance Lift Solutions is at the forefront of artificial lift innovation, delivering solutions and service to enhance recoveries and run life.

CHALLENGE

The goal of any ESP installed in the Bakken is to achieve a balance of superior performance in relation to run-life longevity. The challenge is accomplishing this in the face of some of the harshest wellbore conditions found on US Land.

SOLUTION

Our experienced team worked closely with the operator, collaborating via basin specific expertise, to recommend and deliver the right system for the application at hand. **The ESP was installed on May 10, 2021.**


RESULTS

The Endurance Lift ESP and capillary teams, pairing leading-edge equipment with experienced, unparalleled service, have delivered for the operator from day 1 to day 767 (and counting).

“With this 2 year run time we were able to push off the spend of additional ESPs and a rod up workover, deferring ~\$800K. We forecast ESPs to run 8-9 months in this area of the field and we are currently on month 24.” -- Bakken Production Engineer

PROJECT DESCRIPTION

Location
Bakken Formation

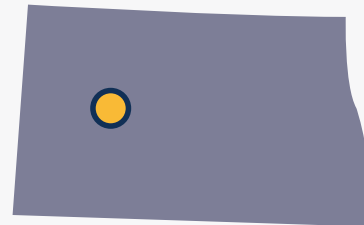

Customer:	Large Bakken Operator
Sys.Specifics:	Tapered 1750L System / 204HP
Pump Set Depth:	9,800'
Mo. 1 Avg Prod:	1,435 bopd / 1,847 bwpd / 1,480 mcf
Mo. 24 Avg Prod:	214 bopd / 273 bwpd / 470 mcf
Total Production:	407,947 bbl oil
ELS Run Days:	767 days and counting...



Contact your local representative for more information on our ESP products and services.

↑ RUNNING

6/15/2023, 8:51 AM

All 1W 1M 3M 6M 1Y

Tubing/Casing Pressure

